


APPLICATIONS

- ✓ All fruite trees and green houses

**Warranty
3 years**

DRIPPER FLOW VS. PRESSURE

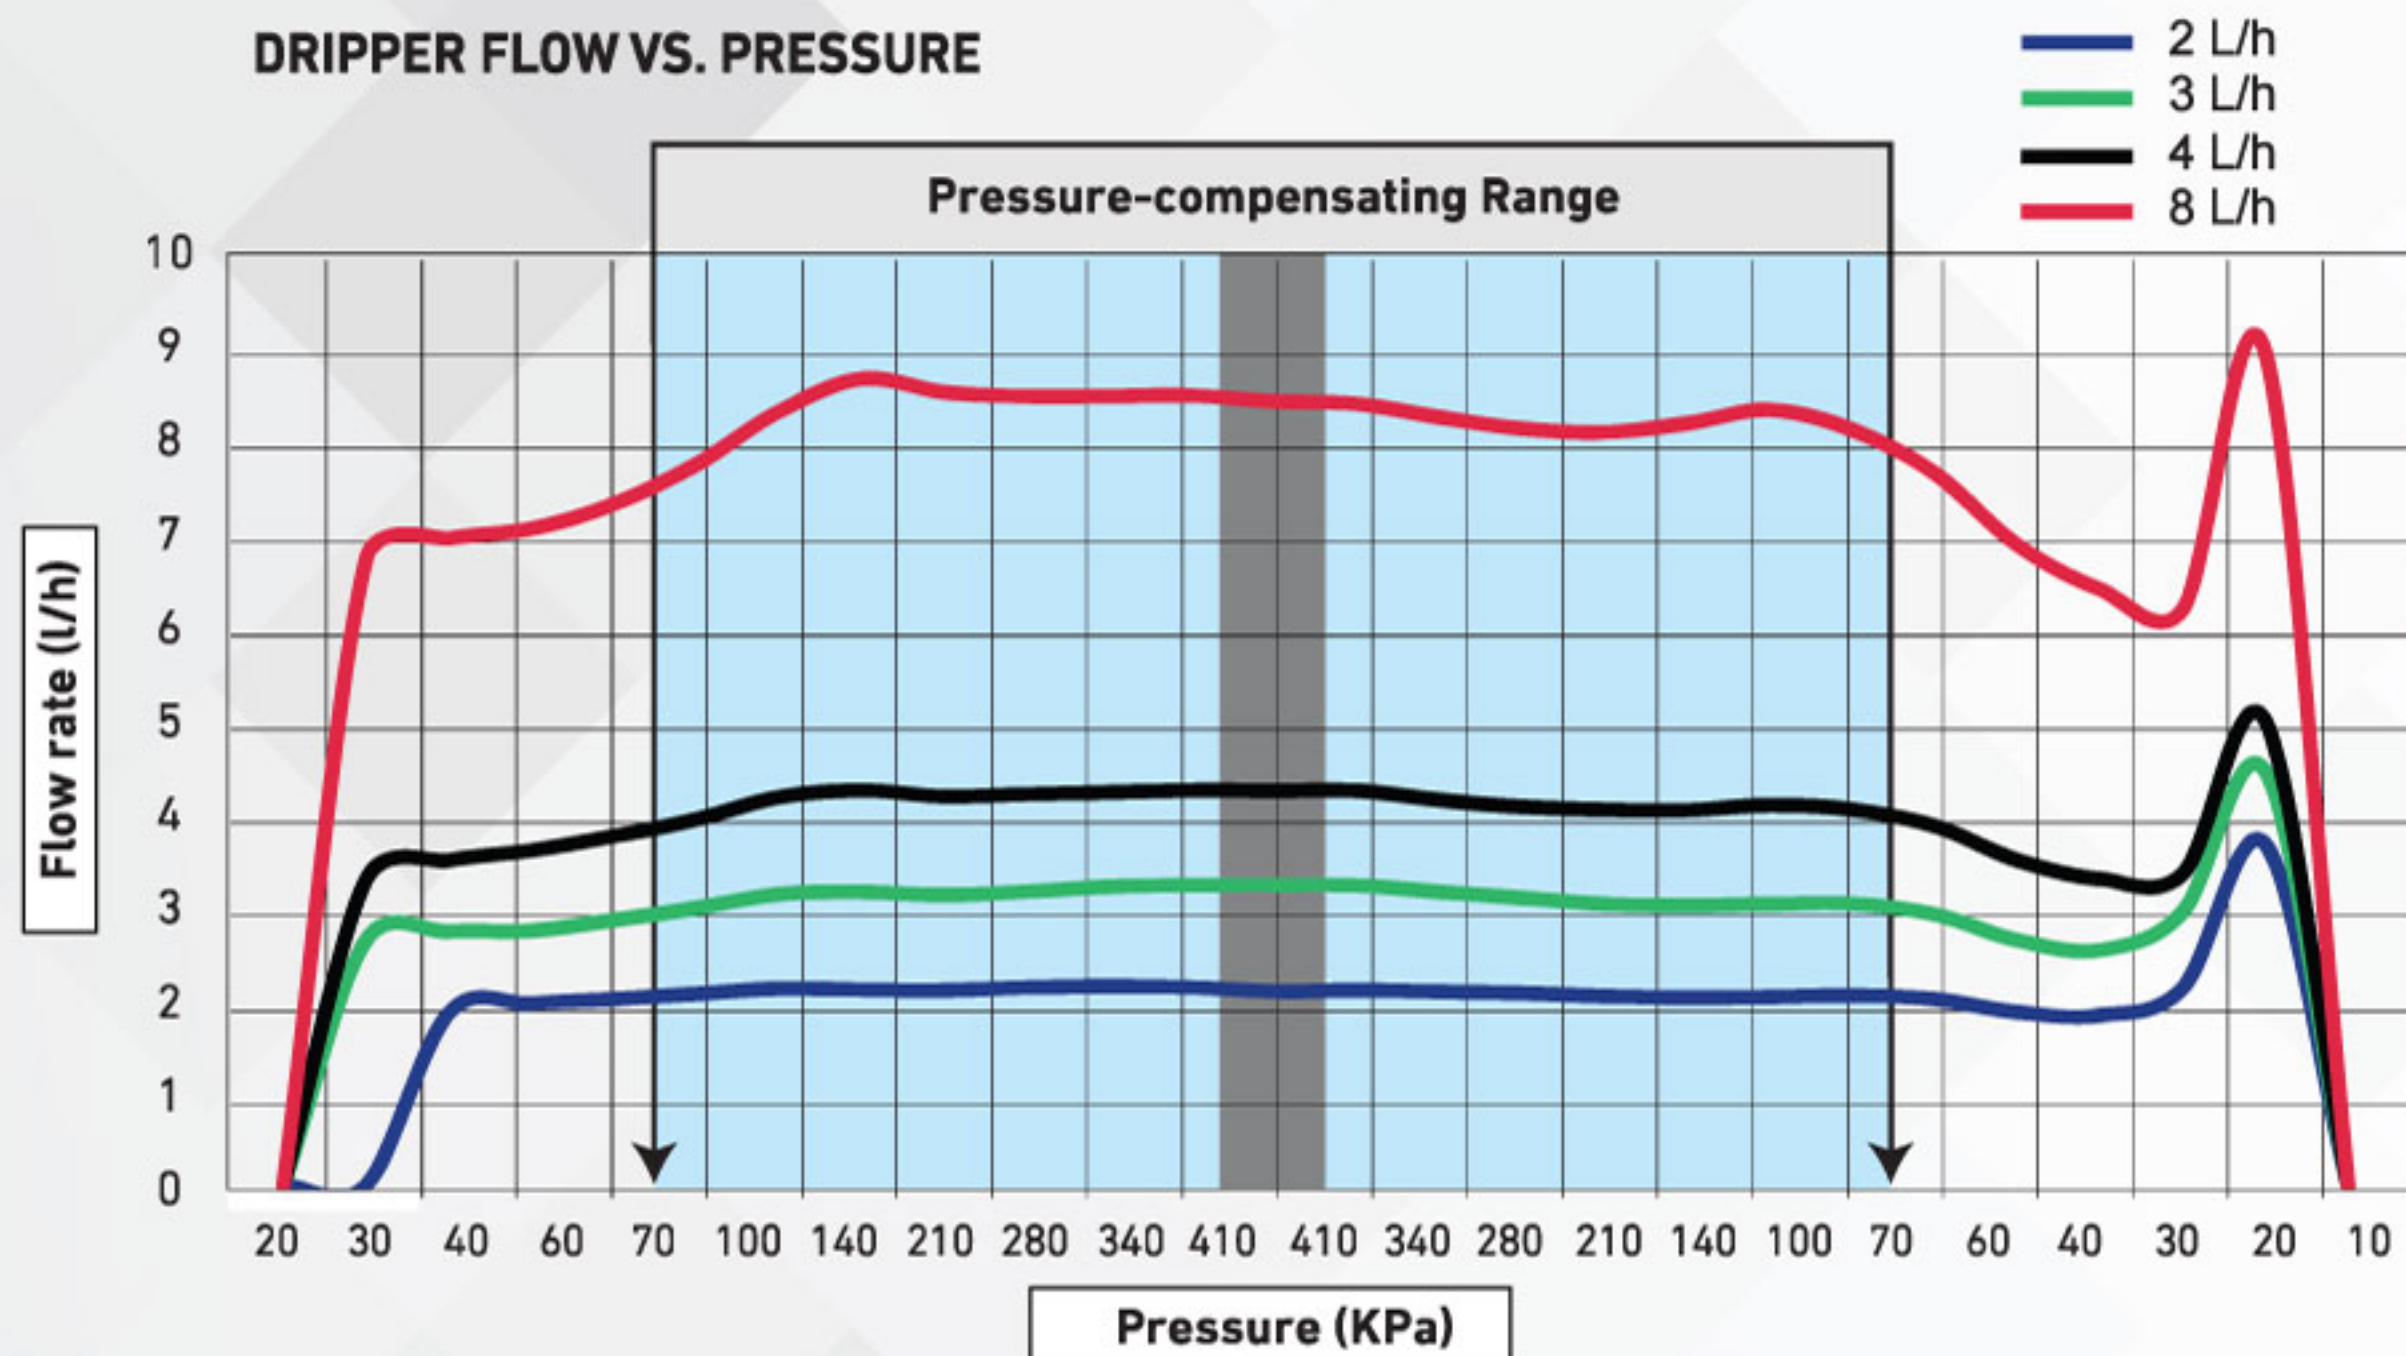

RANGE

- ✓ 4 different nominal flow rates :
2, 3, 4, 8 l/h

- ✓ 3 outlets:
3 mm barbed coupling
Male adapter
Anti-Insect Cap



MALE OUTLET

DPCT02-MA-BLUE	2 l/h
DPCT03-MA-GRN	3 l/h
DPCT04-MA-BLK	4 l/h
DPCT08-MA-RED	8 l/h

TORO AG-USA



EURO-PLUS

Serviceable Pressure-Compensating Dripper

**World Best
Drippers**



APPLICATIONS

Ideal for long sloping lines and where the land is not flat.

FEATURES

- Serviceable dripper to allow quick and easy maintenance of the system.
- Lug-equipped base to hold the dripper in position along the drip line.
- Silicone membrane.
- 4 mm inlet barbed coupling.
- Male outlet with connection for 4x6mm microtube.

SPECIFICATIONS

- Nominal flow rate: 4, 8 and 16 l/h.
- Pressure-compensating Range: 1.0-3.0 bar.
- Variation Coefficient (VC) ≤5%.
- Recommended filtration: 150 mesh.
- Compliant with ISO 9261: 2004 standard.

**Warranty
3 years**

PERFORMANCE

Model	Flow rate in l/h @				
	1.0 bar	1.5 bar	2.0 bar	2.5 bar	3.0 bar
IT-DPJ04-2	4.2	4.3	4.6	4.7	4.6
IT-DPJ08-2	8.2	9	9.2	9.1	8.7
IT-DPJ15-2	12.2	14	15.5	16.5	15.5

Codification

Code	Description
EU-DPJ04-2	Euro-Plus serviceable dripper with nominal flow rate of 4 l/h
EU-DPJ08-2	Euro-Plus serviceable dripper with nominal flow rate of 8 l/h
IT-DPJ15-2	Euro-Plus serviceable dripper with nominal flow rate of 16 l/h



Black Base nominal flow rate 4 l/h



Red Base nominal flow rate 8 l/h



Brown Base nominal flow rate 16 l/h

Office : 72-B Gulberg II Lahore - Pakistan
 Tel : +92 42 35790637-8 , Mob : +92 300 8711434
 Email : info@hsinternational.pk , URL : www.hsinternational.pk



NGE® SF

Pressure-Compensating Self-Cleaning Dripper

**World Best
Drippers**



The Pressure-Compensating NGE® SF dripper has been designed to meet the irrigation needs of vineyards and orchards in general, including in difficult topographical conditions. The NGE® SF is equipped with a self-cleaning system which eliminates any debris in the dripper during the normal operation of the system. The anti-siphon system also protects it against the suction effect at the end of irrigation, ensuring high resistance to clogging.

FEATURES

- ✓ Pressure-compensating Range : 0.6-4.1 bar
- ✓ Variation coefficient VC <3%
- ✓ Silicon membrane
- ✓ Filtration required : 120 mesh
- ✓ Acid resistant to pH2



HAJI SONS INTERNATIONAL
 IRRIGATION LANDSCAPING SOLAR SYSTEM LASER LAND LEVELER SEEDS

Total Irrigation & Solar Solutions

Email : info@hsinternational.pk URL : www.hsinternational.pk